


ASSEMBLY INSTRUCTIONS

TETRIS

IP65    

WARNINGS:

- * THE INSTALLATION AND THE MAINTENANCE OF THE PRODUCT MUST BE DONE BY PROFESSIONAL INSTALLERS.
- * THE SAFETY OF THIS PRODUCT IS GUARANTEED ONLY WITH THE APPROPRIATE USE OF THESE INSTALLATION INSTRUCTIONS WHICH MUST BE RETAINED.
- * SWITCH OFF THE POWER BEFORE CONDUCTING ANY KIND OF MAINTENANCE.
- * THE BASE AND THE OTHER PARTS OF THE PRODUCT CANNOT BE COVERED BY SOIL OR PUT IN CONTACT WITH AGGRESSIVE CHEMICAL SUBSTANCES (HERBICIDES, FERTILIZERS, ETC.).
- * DO NOT REST OBJECTS ON THE DIFFUSER, DO NOT COVER OR OBSCURE IN ANY WAY
- * CLEAN PERIODICALLY THE PARTS COVERED BY SOIL.
- * USE ONLY POWER CABLES WITH DOUBLE SHEATH, DO NOT USE SINGLE CABLES.
- * USE ONLY FLEXIBLE CABLES (E.G. "HAR" TYPE), OR CABLES SUITABLE FOR OUTDOOR USE.
- * IT IS ADVISABLE TO USE THE SILICONE GREASE ON THE THREADED PARTS OF THE CLOSING SCREWS, IN ORDER TO MAKE FURTHER MAINTENANCE EASIER.
- * CONTROL THE FITTING'S VOLTAGE RATING BEFORE CONNECTING TOV POWER SUPPLY.
- * FITTING INCLUDING TAMPER-PROOF SECURITY SCREW. USE THE TOOL INCLUDED IN THE PRODUCT PACKAGING.

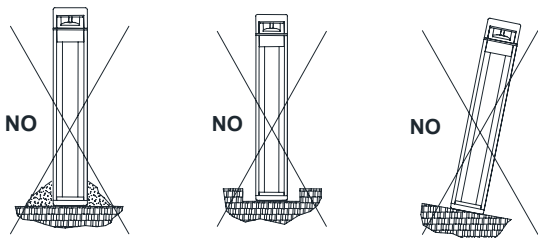


INSTALLATION INSTRUCTIONS:

1. Untighten the cord blocks (4;5;6).
2. Insert the power cable (7) into the cord blocks (4;6) and into the gaskets (8;10).


ATTENTION: use a Ø5÷13 mm cable. If you use a cable with a diameter bigger than 9mm remove the inner gasket (8) located into the cable gland.

3. Slip off the terminal (9) from the watertight compartment, and connect it to the supply cable (7) paying attention to observe the correct polarities.
4. Close the watertight terminal block (11) by tightening the cord blocks tightly (4;5;6) paying attention to place the gaskets correctly (8;10).

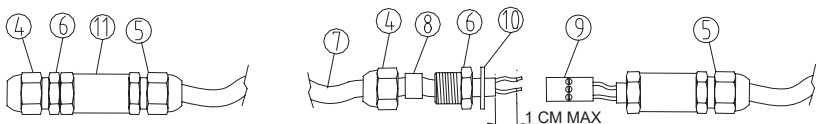

The EC declaration of conformity is available for download from our website www.marecoluce.it

Rev. 3 - 15/02/2016

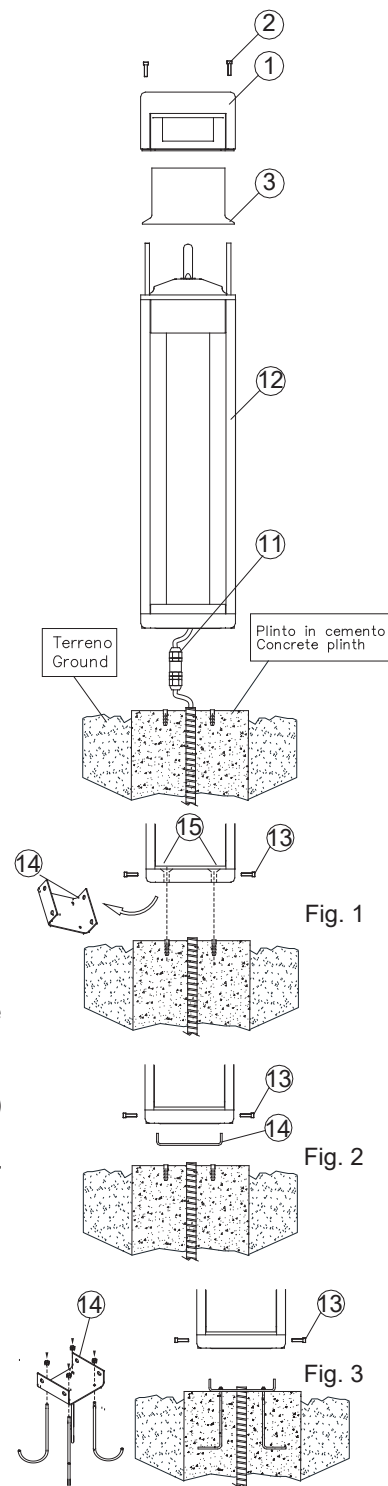

FOR 35W – 70W MT VERSIONS:

6. Disassemble the top cover (1) loosening the screws (2) and remove the diffuser (3).
7. Mount the lamp (not included).
8. Install the diffuser (3).
9. Position the top cover (1) on the diffuser upper part (3) paying attention to the correct positioning of the gasket.
10. Complete top assembly (1) tightening the screws (2).

DIRECT BASE FIXING (FOR TETRIS 1 AND 3 ONLY)

- Before proceeding with the **INSTALLATION INSTRUCTIONS** untighten the screws (13) and remove the counter-flange (14).
- Follow steps 1 to 4
- Fix the light fitting to the mounting surface using the holes (15) on the base, the screws and the expansion caps (**not included**).

INSTALLATION THROUGH COUNTER-FLANGE (ALL VERSIONS)

- Before proceeding with the **INSTALLATION INSTRUCTIONS** untighten the screws (13) and remove the counter-flange (14).
- Fix the counter-flange (14) to the mounting surface through the screws and expansion caps (not included) Fig. 2 or through the anchor bolts (to be ordered separately) Fig.3
- Follow steps 1 to 4
- Insert the bollard (12) in the flange (14) and tighten the screws (13).